



**INSTALLATION INSTRUCTIONS**  
**EM-B40004-NJ & EM-B40005-NJ (PIM RATED)**  
**(698-960/1710-2700 MHz)**  
**MULTI-BAND INDOOR CEILING MOUNT ANTENNA**

*Congratulations on your selection of another quality antenna product from E/M Wave.  
E/M Wave is committed to continually provide the greatest antenna VALUE for your wireless applications.*

1. **Ceiling Panel:** Antenna mounts to any panel surface up to 11/32 inch (8.7mm) thick.
2. Determine Mounting location. Drill or punch 3/4 inch (19mm) hole through the panel surface.
3. Remove the plastic mounting nut from the antenna stud.
4. Insert the N Connector and cable through the mounting hole as shown in Fig. 1.
5. Attach the plastic nut by passing the nut over the feed cable assembly.
6. Secure the nut with firm hand torque until antenna is completely seated against the mounting surface. Do not apply excessive torque.
7. Attach Coaxial Transmission Line to the antenna feed cable.

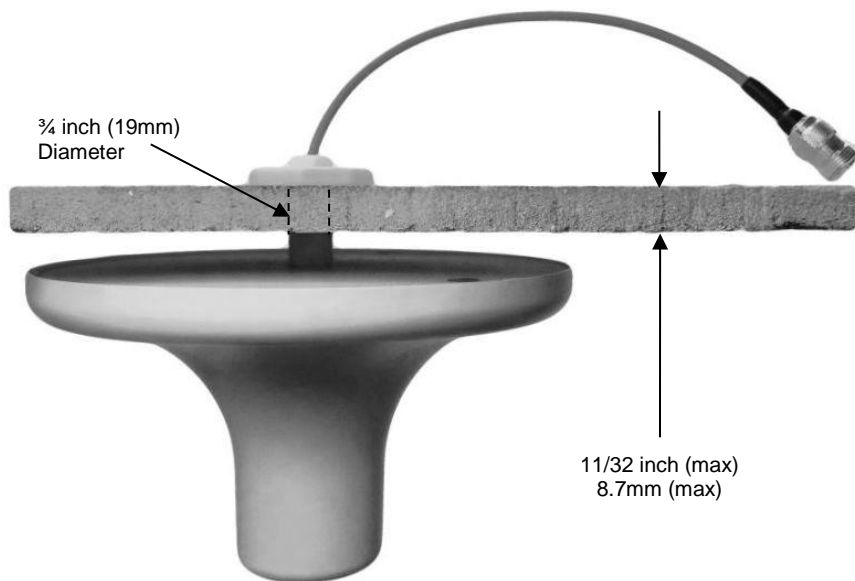


Figure 1

**For Product and Warranty Information**  
[www.emwaveinc.com](http://www.emwaveinc.com)